

L3 Linear Style

Power








| Luminous flux | 5760 lm |
|-------------------------------|----------------|
| Luminaire efficiency | 128 lm/W |
| CRI | > 80 |
| Correlated colour temperature | 4000 K |
| Rated power | 45 W |
| LED | Samsung LM561B |
| Dimmable | NO |
| Input current | 0.196 A |
| Working voltage | AC 220-240 V |
| Ingress protection code | IP20 |
| Mech. impact protection code | - |
| Working temperature | -20 to +40°C |
| 5 1 | |

| Service life | 80 000 hours at 80% Iuminous flux |
|--------------------|--|
| Housing | Aluminium |
| Diffuser | Polystyrol |
| Installation | Surface mounting or suspended on wire |
| Dimensions – LxWxH | 1840x27 mm |
| Weight | - |
| Mark | CE, RoHS |
| Origin | EU |
| Manufacturer | Solar LED Power Ltd. |



Dimensional drawing:

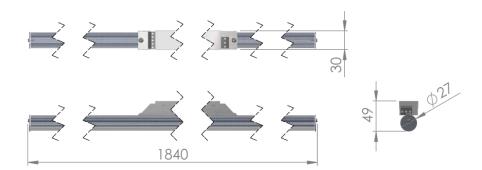

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.

www.ledpower.bg