


# L3 Recessed Style



## LP-L3-60X120 DALI 850

Art. No 541531109

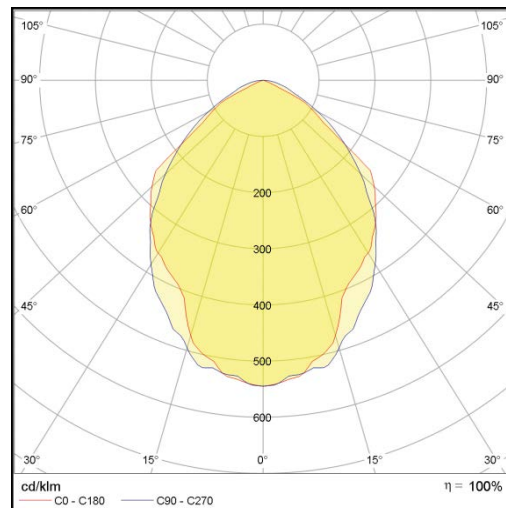


Luminous flux	8640 lm
Luminaire efficiency	120 lm/W
CRI	> 80
Correlated colour temperature	5000 K
Rated power	72 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.313 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	80 000 hours at 80% luminous flux
Housing	Steel Sheet
Diffuser	Polystyrol
Installation	Recessed in modular ceilings with visible grid system 600x1200
Dimensions – LxWxH	1195x595x85 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

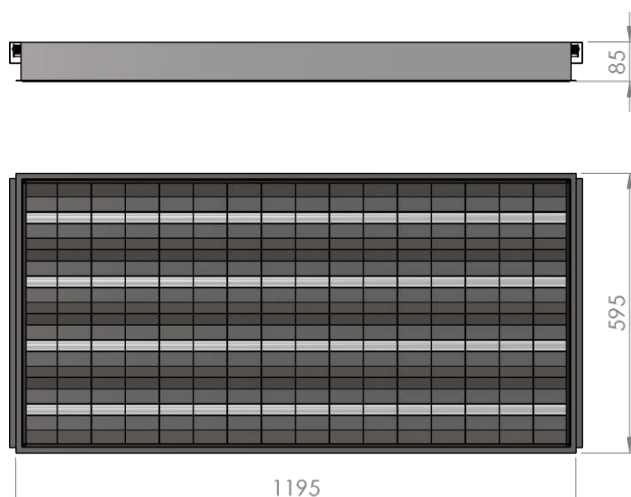

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.