


L3 Linear Style



LP-L3-60X60FR-192 DALI 830

Art. No 530331101

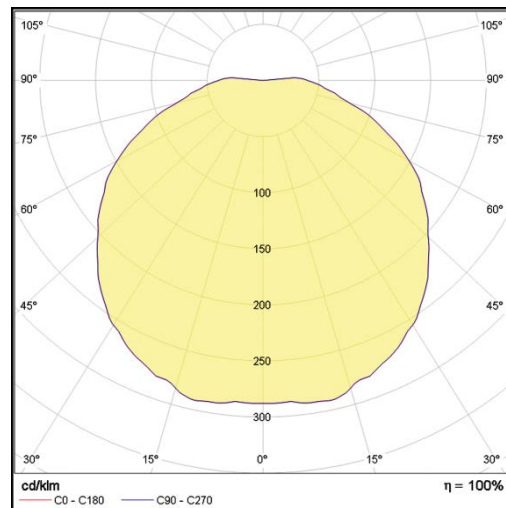


| | |
|-------------------------------|----------------|
| Luminous flux | 6770 lm |
| Luminaire efficiency | 121 lm/W |
| CRI | > 80 |
| Correlated colour temperature | 3000 K |
| Rated power | 56 W |
| LED | Samsung LM561B |
| Dimmable | YES - to 1% |
| Input current | 0.243 A |
| Working voltage | AC 220-240 V |
| Ingress protection code | IP20 |
| Mech. impact protection code | - |
| Working temperature | -20 to +40°C |

| | |
|--------------------|---------------------------------------|
| Service life | 80 000 hours at 80% luminous flux |
| Housing | Aluminium |
| Diffuser | Polystyrol |
| Installation | Surface mounting or suspended on wire |
| Dimensions – LxWxH | 651x651x25 mm |
| Weight | - |
| Mark | CE, RoHS |
| Origin | EU |
| Manufacturer | Solar LED Power Ltd. |



Dimensional drawing:

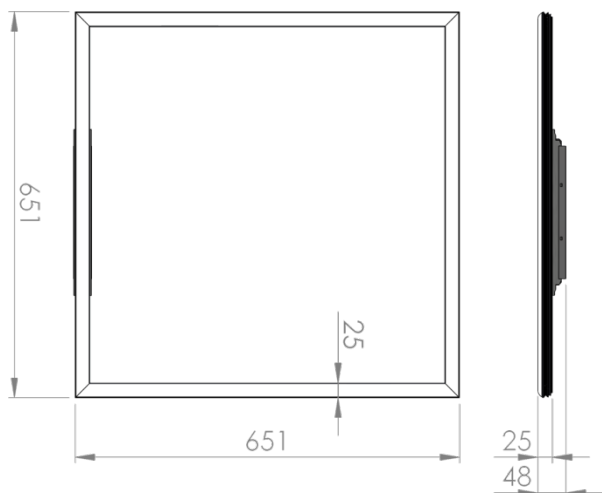

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.