


# L4 Spot Style



**LP-L4U-30L-45P 45° 840**

Art. No 110411549

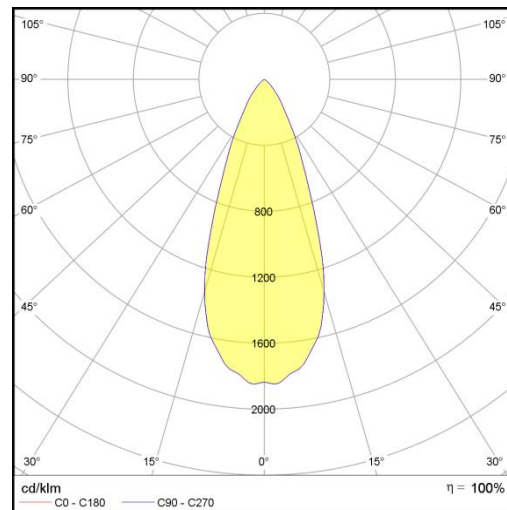


Luminous flux	2240 lm
Luminaire efficiency	64 lm/W
CRI	> 80
Correlated colour temperature	4000 K
Rated power	35 W
LED	PROLight
Dimmable	NO
Input current	0.152 A
Working voltage	AC 220-240 V
Ingress protection code	IP67
Mech. impact protection code	IK08
Working temperature	-50 to +45°C

Service life	80 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	Tempered Glass
Installation	Surface mounting with bracket
Dimensions – LxWxH	373x117x94 mm
Weight	2.7 kg
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

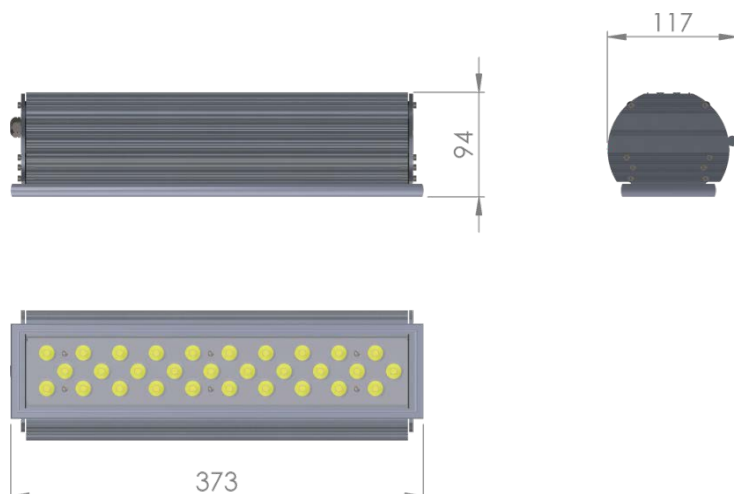

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.