## L5 Linear All In Style

## LP-L5-P160-192 BPS 850

Art. No 555511376






	+		1	
90°				90°
75°			M/	75
60°	M	200	XX	60
	AK I	/ 255	1 1	
45°	17	300	TI	45
		400		
	1	500		
		40.5 kg/s		
30°	15°	0°	15°	30°


Luminous flux	7440 lm
Luminaire efficiency	124 lm/W
CRI	> 80
Correlated colour temperature	5000 K
Rated power	60 W
LED	Samsung LM561B
Dimmable	NO
Input current	0.26 A
Working voltage	AC 220-240 V
Ingress protection code	IP54
Mech. impact protection code	-
Working temperature	-30 to +40°C

Service life	100 000 hours at 80% luminous flux	
Housing	Aluminium	
Diffuser	PMMA	
Installation	Surface mounting or suspended on wire/chain	
Dimensions – LxWxH	1580x124x93 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



## Dimensional drawing:

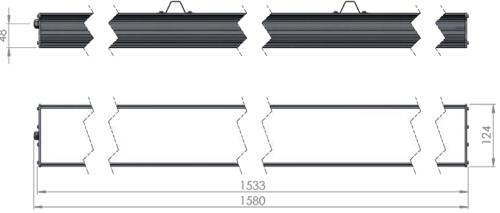

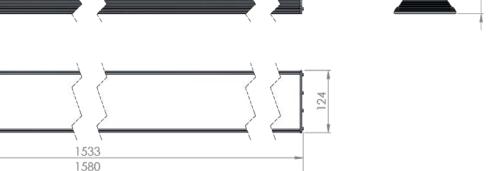

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.