L5 Linear All In Style

LP-L5-P160-288 BPS 830

Art. No 555311383






105°	1			105°
90°				90°
75°			M.	75°
.60°		200		60°
45°	A	300		45°
$\sqrt{}$		500		1
30°	15°	0°	15°	30°
cd/klm C0 - C180	C90 - C270			$\eta = 100\%$

Luminous flux	8960 lm	
Luminaire efficiency	112 lm/W	
CRI	> 80	
Correlated colour temperature	3000 K	
Rated power	80 W	
LED	Samsung LM561B	
Dimmable	NO	
Input current	0.347 A	
Working voltage	AC 220-240 V	
Ingress protection code	IP54	
Mech. impact protection code	-	
Working temperature	-30 to +40°C	

100 000 hours at 80% luminous flux		
Aluminium		
PMMA		
Surface mounting or		
suspended on wire/chain		
1580x124x93 mm		
-		
CE, RoHS		
EU		
Solar LED Power Ltd.		



Dimensional drawing:

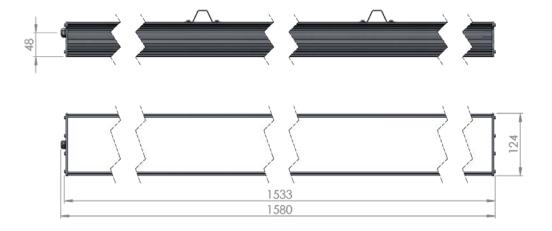



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.