## L5 Linear All In Style

## LP-L5-P160-288 BPS DALI 830

Art. No 555331386






	1		1	
90°				90
75°			W.	75
60°		200	H	60
X		300	+ 1	$\times$
45°	1	400		45
$\sqrt{}$	1	500		
30°	15°	0°	15°	30°
cd/klm C0 - C18	0 — C90 - C270			$\eta = 100\%$

Luminous flux	8960 lm	
Luminaire efficiency	112 lm/W	
CRI	> 80	
Correlated colour temperature	3000 K	
Rated power	80 W	
LED	Samsung LM561B	
Dimmable	YES - to 1%	
Input current	0.347 A	
Working voltage	AC 220-240 V	
Ingress protection code	IP54	
Mech. impact protection code	-	
Working temperature	-30 to +40°C	

Service life	100 000 hours at 80% luminous flux	
Housing	Aluminium	
Diffuser	PMMA	
Installation	Surface mounting or suspended on wire/chain	
Dimensions – LxWxH	1580x124x93 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



## Dimensional drawing:

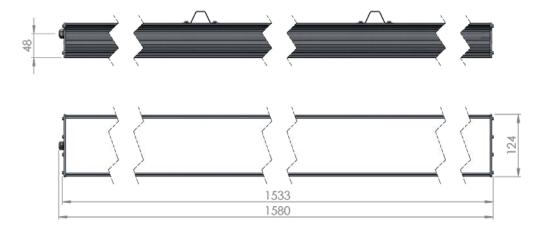



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.