L5 Linear All In Style

LP-L5-P160-288 BPS DALI 840

Art. No 555431387






105°	1 Y	10
-90°		9
.75°		7
60°	200	6
45°	300	4
	400	
30°	15° 0°	15° 30
cd/klm C0 - C	80 —— C90 - C270	$\eta = 100^\circ$

Luminous flux	9440 lm
Luminaire efficiency	118 lm/W
CRI	> 80
Correlated colour temperature	4000 K
Rated power	80 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.347 A
Working voltage	AC 220-240 V
Ingress protection code	IP54
Mech. impact protection code	-
Working temperature	-30 to +40°C

Service life	100 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	PMMA
Installation	Surface mounting or suspended on wire/chain
Dimensions – LxWxH	1580x124x93 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

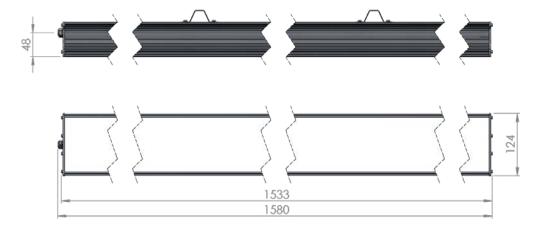



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.