L5 Linear All In Style

LP-L5-P160-288 BPS DALI 850

Art. No 555531388






105°	1	7		1	105°
90°					90°
75°					75°
60°		200	1	X	60°
45°		300			45'
\checkmark	1	500			\setminus
30°	15°	0°		15°	30°
cd/klm C0 - C18	0 — C90 - C				$\eta = 100\%$


Luminous flux	9920 lm		
Luminaire efficiency	124 lm/W		
CRI	> 80		
Correlated colour temperature	5000 K		
Rated power	80 W		
LED	Samsung LM561B		
Dimmable	YES - to 1%		
Input current	0.347 A		
Working voltage	AC 220-240 V		
Ingress protection code	IP54		
Mech. impact protection code	-		
Working temperature	-30 to +40°C		

Service life	100 000 hours at 80% Iuminous flux		
Housing	Aluminium		
Diffuser	PMMA		
Installation	Surface mounting or suspended on wire/chain		
Dimensions – LxWxH	1580x124x93 mm		
Weight	-		
Mark	CE, RoHS		
Origin	EU		
Manufacturer	Solar LED Power Ltd.		



Dimensional drawing:

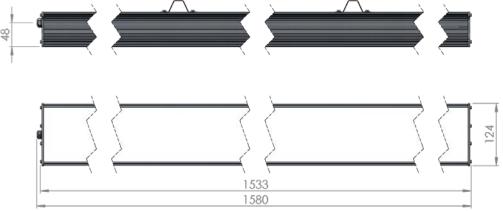

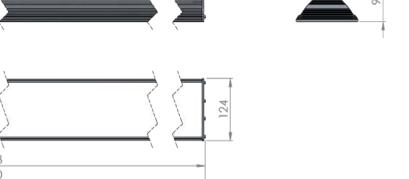

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.