## L5 Linear All In Style

## LP-L5-P160-96 BPS 840

Art. No 555411357






|          | 1      |                |
|----------|--------|----------------|
| 90°      |        | 90°            |
| 75°      |        | 75°            |
| 60°      | 200    | 60°            |
| 45°      | 300    | 45°            |
| $\times$ | 500    | +              |
| 30°      | 15° 0° | 15° 30°        |
| cd/klm   |        | $\eta = 100\%$ |

| Luminous flux                 | 3300 lm        |
|-------------------------------|----------------|
| Luminaire efficiency          | 118 lm/W       |
| CRI                           | > 80           |
| Correlated colour temperature | 4000 K         |
| Rated power                   | 28 W           |
| LED                           | Samsung LM561B |
| Dimmable                      | NO             |
| Input current                 | 0.121 A        |
| Working voltage               | AC 220-240 V   |
| Ingress protection code       | IP54           |
| Mech. impact protection code  | -              |
| Working temperature           | -30 to +40°C   |

| Service life       | 100 000 hours at 80% luminous flux          |
|--------------------|---|
| Housing            | Aluminium                                   |
| Diffuser           | PMMA  |
| Installation       | Surface mounting or suspended on wire/chain |
| Dimensions – LxWxH | 1580x124x93 mm                              |
| Weight             | -   |
| Mark               | CE, RoHS                                    |
| Origin             | EU  |
| Manufacturer       | Solar LED Power Ltd.                        |



## Dimensional drawing:

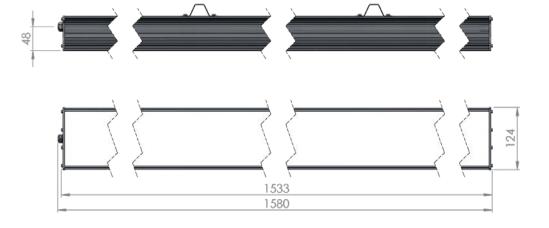



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.