L5 Linear All In Style

LP-L5-P160-96 BPS PWM 840

Art. No 555441363






| 105° | A Y | 105° |
|--------------------|------------|----------|
| 90° | | 90° |
| 75° | | 75° |
| 60° | 200 | 60° |
| 45° | 300 | 45 |
| \checkmark | 500 | |
| 30° | 15° 0° | 15° 30° |
| cd/klm C0 - C18 | C90 - C270 | η = 100% |


| Luminous flux | 3300 lm |
|-------------------------------|----------------|
| Luminaire efficiency | 118 lm/W |
| CRI | > 80 |
| Correlated colour temperature | 4000 K |
| Rated power | 28 W |
| LED | Samsung LM561B |
| Dimmable | YES - to 10% |
| Input current | 0.121 A |
| Working voltage | AC 220-240 V |
| Ingress protection code | IP54 |
| Mech. impact protection code | - |
| Working temperature | -30 to +40°C |

| Service life | 100 000 hours at 80% Iuminous flux |
|--------------------|---|
| Housing | Aluminium |
| Diffuser | PMMA |
| Installation | Surface mounting or suspended on wire/chain |
| Dimensions – LxWxH | 1580x124x93 mm |
| Weight | - |
| Mark | CE, RoHS |
| Origin | EU |
| Manufacturer | Solar LED Power Ltd. |
| | |



Dimensional drawing:

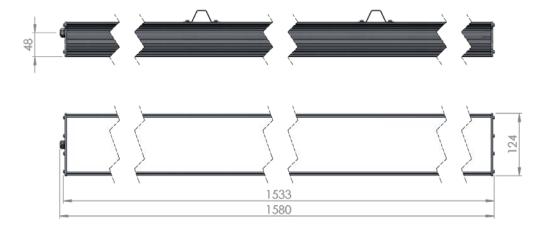



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.