L5 Linear All In Style

LP-L5-P280-192 BPS DALI 840

Art. No 555431342






105°		105°
90°		90°
75°		75°
,60°	200	60°
45°	300	45°
7	500	
30°	15° 0°	15° 30°
cd/klm C0 - C180		$\eta = 100\%$

Luminous flux	7080 lm
Luminaire efficiency	118 lm/W
CRI	> 80
Correlated colour temperature	4000 K
Rated power	60 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.26 A
Working voltage	AC 220-240 V
Ingress protection code	IP54
Mech. impact protection code	-
Working temperature	-30 to +40°C

Service life	100 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	PMMA
Installation	Surface mounting or suspended on wire/chain
Dimensions – LxWxH	2740x124x93 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

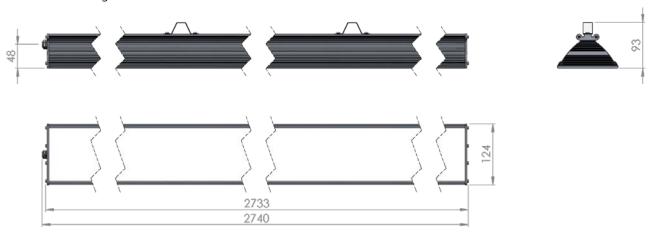

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.