## L5 Linear All In Style

## LP-L5-P280-192 BPS PWM 840

Art. No 555441345






-90°			9
75°			7
60°		200	6
45°		300	
		400	$\times$
30°	15°	0° 15°	3
cd/klm			η= 100

Luminous flux	7080 lm	
Luminaire efficiency	118 lm/W	
CRI	> 80	
Correlated colour temperature	4000 K	
Rated power	60 W	
LED	Samsung LM561B	
Dimmable	YES - to 10%	
Input current	0.26 A	
Working voltage	AC 220-240 V	
Ingress protection code	IP54	
Mech. impact protection code	-	
Working temperature	-30 to +40°C	

Service life	100 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	PMMA
Table Hartan	Surface mounting or
Installation	suspended on wire/chain
Dimensions – LxWxH	2740x124x93 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



## Dimensional drawing:

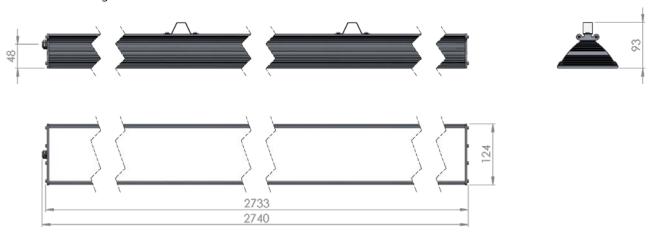

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.