L5 Linear Style

LP-L5-P300-240 DALI 840

Art. No 552431162






90° 75° 80° 200 300 500		77 7	
500 200 300 45° 400 500	90°		90
45°	75°		75
45°)0°		60
	15°		45
	\times	500	
30° 15° 0° 15°	30°	15° 0°	15° 30°

Luminous flux	7580 lm
Luminaire efficiency	126 lm/W
CRI	> 80
Correlated colour temperature	4000 K
Rated power	60 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.26 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-30 to +40°C

Service life luminous flux	
Housing Aluminium	
Diffuser PMMA	
Surface mounting or suspended on wire/cha	in
Dimensions – LxWxH 3035x124x93 mm	
Weight 5.2 kg	
Mark CE, RoHS	
Origin EU	
Manufacturer Solar LED Power Ltd.	



Dimensional drawing:

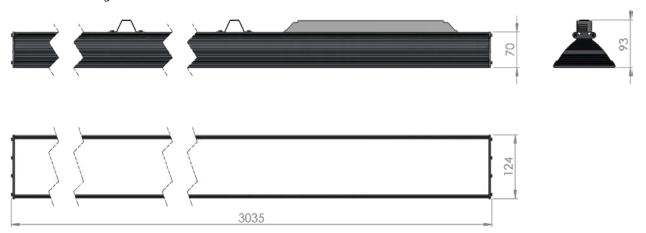

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.