L5 Linear Igor Style

LP-L5-P300-240 IG DALI 830

Art. No 553331251






2000	1	X-+	
90°			90
75°			75
60°		2000	60
45°		100	45
\times		500	
30°	15°	0° 15°	30°
cd/klm			η = 100%

Luminous flux	7160 lm	
Luminaire efficiency	120 lm/W	
CRI	> 80	
Correlated colour temperature	3000 K	
Rated power	60 W	
LED	Samsung LM561B	
Dimmable	YES - to 1%	
Input current	0.26 A	
Working voltage	AC 220-240 V	
Ingress protection code	IP33	
Mech. impact protection code	-	
Working temperature	-30 to +40°C	

Service life	100 000 hours at 80% luminous flux	
Housing	Aluminium	
Diffuser	PMMA	
Installation	Surface mounting or suspended on wire/chain	
Dimensions – LxWxH	3053x124x111 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



Dimensional drawing:

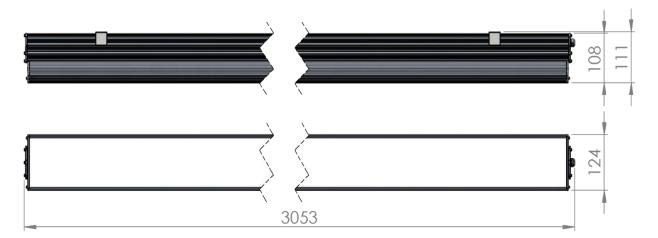

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.