


# L5 Linear All In Style



## LP-L5-P50-48 BPS PWM 830

Art. No 555341434

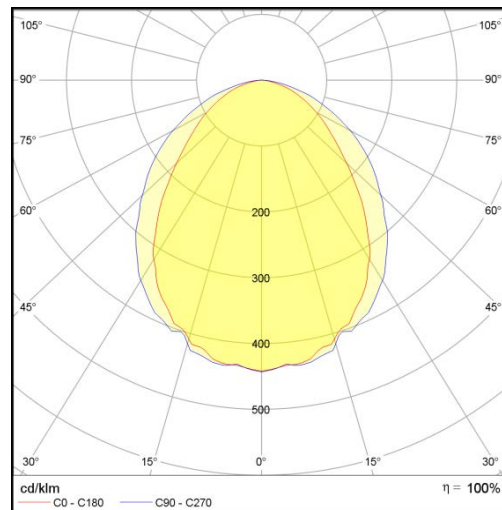


|                               |                |
|-------------------------------|----------------|
| Luminous flux                 | 1560 lm        |
| Luminaire efficiency          | 112 lm/W       |
| CRI                           | > 80           |
| Correlated colour temperature | 3000 K         |
| Rated power                   | 14 W           |
| LED                           | Samsung LM561B |
| Dimmable                      | YES - to 10%   |
| Input current                 | 0.06 A         |
| Working voltage               | AC 220-240 V   |
| Ingress protection code       | IP54           |
| Mech. impact protection code  | -              |
| Working temperature           | -30 to +40°C   |

|                    |   |
|--------------------|---|
| Service life       | 100 000 hours at 80% luminous flux          |
| Housing            | Aluminium                                   |
| Diffuser           | PMMA  |
| Installation       | Surface mounting or suspended on wire/chain |
| Dimensions – LxWxH | 540x124x93 mm                               |
| Weight             | -   |
| Mark               | CE, RoHS                                    |
| Origin             | EU  |
| Manufacturer       | Solar LED Power Ltd.                        |



Dimensional drawing:

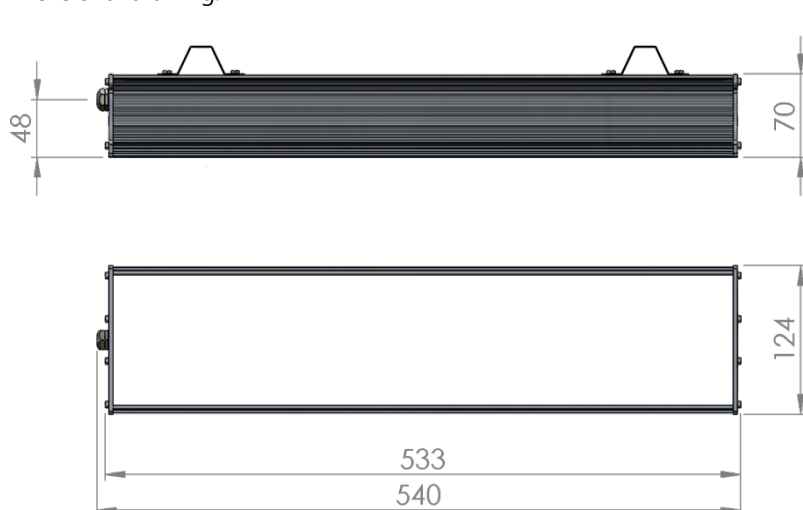

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.