## L5 Linear Igor Style

## LP-L5-P60-72 IG PWM 830

Art. No 553341317






105°	17 1	10
90°		9
.75°		7
,60°	200	e
45°	300	
7	500	
30°	15° 0°	15° 3
cd/klm C0 - C18	C90 - C270	$\eta = 100$

Luminous flux	2240 lm
Luminaire efficiency	112 lm/W
CRI	> 80
Correlated colour temperature	3000 K
Rated power	20 W
LED	Samsung LM561B
Dimmable	YES - to 10%
Input current	0.086 A
Working voltage	AC 220-240 V
Ingress protection code	IP33
Mech. impact protection code	-
Working temperature	-30 to +40°C

Service life	100 000 hours at 80% luminous flux
Housing	Aluminium
Diffuser	PMMA
Installation	Surface mounting or suspended on wire/chain
Dimensions – LxWxH	653x124x111 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



## Dimensional drawing:

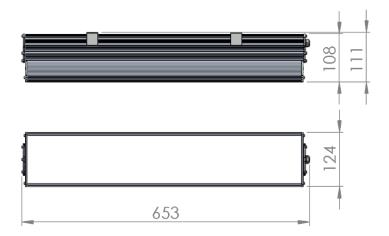

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.