L5 Linear All In Style

LP-L5-P90-72 BPS PWM 840

Art. No 555441408






105°	1			105
90°				90
75°			1	75
60°		200		60
45°		300 400		45
\checkmark		500		
30°	15°	0°	15°	30°
cd/klm C0 - C18	30 —— C90 - C270			$\eta = 100\%$

Luminous flux	2360 lm	
Luminaire efficiency	118 lm/W	
CRI	> 80	
Correlated colour temperature	4000 K	
Rated power	20 W	
LED	Samsung LM561B	
Dimmable	YES - to 10%	
Input current	0.086 A	
Working voltage	AC 220-240 V	
Ingress protection code	IP54	
Mech. impact protection code	-	
Working temperature	-30 to +40°C	

Service life	100 000 hours at 80% luminous flux	
Housing	Aluminium	
Diffuser	PMMA	
Installation	Surface mounting or suspended on wire/chain	
Dimensions – LxWxH	840x124x93 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



Dimensional drawing:

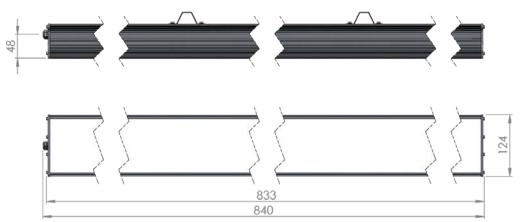



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.