## L5 Linear All In Style

## LP-L5-P90-96 BPS PWM 850

Art. No 555541418






	+		1	
90°				90°
75°			M/	75
60°	M	200	XX	60
	AK I	/ 255	1 1	
45°	X	300	TI	45
		400		
	1	500		
		40.5 kg/s		
30°	15°	0°	15°	30°

Luminous flux	3720 lm	
Luminaire efficiency	124 lm/W	
CRI	> 80	
Correlated colour temperature	5000 K	
Rated power	30 W	
LED	Samsung LM561B	
Dimmable	YES - to 10%	
Input current	0.13 A	
Working voltage	AC 220-240 V	
Ingress protection code	IP54	
Mech. impact protection code	-	
Working temperature	-30 to +40°C	

Service life	100 000 hours at 80% luminous flux	
Housing	Aluminium	
Diffuser	PMMA	
Installation	Surface mounting or suspended on wire/chain	
Dimensions – LxWxH	840x124x93 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



## Dimensional drawing:

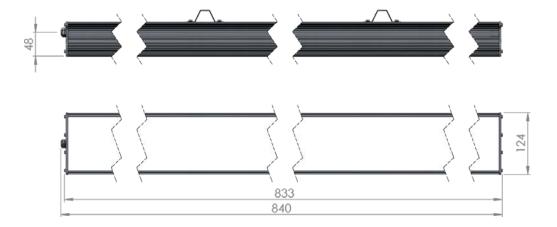



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.