


# LC Ceiling Style



## LP-PVC11-25 Phase Cut 830

Art. No 51132585

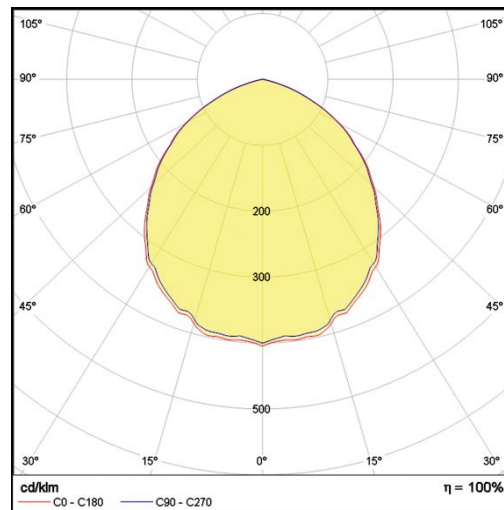

|                               |                |
|-------------------------------|----------------|
| Luminous flux                 | 830 lm         |
| Luminaire efficiency          | 117 lm/W       |
| CRI                           | > 80           |
| Correlated colour temperature | 3000 K         |
| Rated power                   | 7 W            |
| LED                           | Samsung LM561B |
| Dimmable                      | YES - to 10%   |
| Input current                 | 0.03 A         |
| Working voltage               | AC 220-240 V   |
| Ingress protection code       | IP20           |
| Mech. impact protection code  | -              |
| Working temperature           | -20 to +40°C   |

|                    |                                    |
|--------------------|------------------------------------|
| Service life       | 100 000 hours at 80% luminous flux |
| Housing            | Polyvinyl chloride                 |
| Diffuser           | PMMA                               |
| Installation       | Surface mounting                   |
| Dimensions – LxWxH | 245x245x60 mm                      |
| Weight             | 0.5 kg                             |
| Mark               | CE, RoHS                           |
| Origin             | EU                                 |
| Manufacturer       | Solar LED Power Ltd.               |



Dimensional drawing:



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.

[www.ledpower.bg](http://www.ledpower.bg)