
LC Ceiling Style

LP-PVC12-50 850 Art. No 51151596








| Luminous flux | 1890 lm |
|-------------------------------|----------------|
| Luminaire efficiency | 135 lm/W |
| CRI | > 80 |
| Correlated colour temperature | 5000 K |
| Rated power | 14 W |
| LED | Samsung LM561B |
| Dimmable | NO |
| Input current | 0.06 A |
| Working voltage | AC 220-240 V |
| Ingress protection code | IP20 |
| Mark immeration state | |
| Mech. impact protection code | |
| Working temperature | -20 to +40°C |

| Service life | 100 000 hours at 80% Iuminous flux |
|--------------------|---------------------------------------|
| Housing | Polyvinyl chloride |
| Diffuser | PMMA |
| Installation | Surface mounting |
| Dimensions – LxWxH | 495x245x60 mm |
| Weight | - |
| Mark | CE, RoHS |
| Origin | EU |
| Manufacturer | Solar LED Power Ltd. |

((

Dimensional drawing:

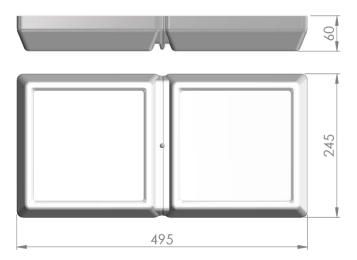

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.

www.ledpower.bg