LC Ceiling Style

LP-PVC12-72 840

Art. No 51141604






30°	15°	0°	15°	η = 1009
	1	500		
	1			
45°		300		45
\times				X
60°	\mathcal{M}	200	\times	60
				Ĺ "
75°				75
90°				90
	1			

Luminous flux	2200 lm
Luminaire efficiency	123 lm/W
CRI	> 80
Correlated colour temperature	4000 K
Rated power	18 W
LED	Samsung LM561B
Dimmable	NO
Input current	0.078 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	100 000 hours at 80%	
Service lile	luminous flux	
Housing	Polyvinyl chloride	
Diffuser	PMMA	
Installation	Surface mounting	
Dimensions – LxWxH	495x245x60 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



Dimensional drawing:

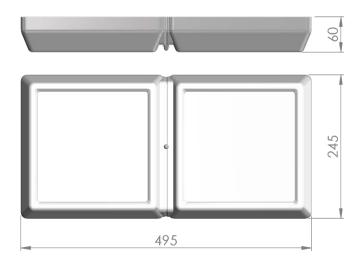

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.