LC Ceiling Style

LP-PVC12-72 DALI 850

Art. No 51153611






cd/klm				η = 1009
30°	15°	0°	15°	30°
\checkmark	7	500		
	1			
45°	\times			45
		300		\times
60°	$\times I /$	200		60
				/_
75°				75
1				
90°				90
105°				105

Luminous flux	2320 lm
Luminaire efficiency	130 lm/W
CRI	> 80
Correlated colour temperature	5000 K
Rated power	18 W
LED	Samsung LM561B
Dimmable	YES - to 1%
Input current	0.078 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	100 000 hours at 80%	
Service lile	luminous flux	
Housing	Polyvinyl chloride	
Diffuser	PMMA	
Installation	Surface mounting	
Dimensions – LxWxH	495x245x60 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



Dimensional drawing:

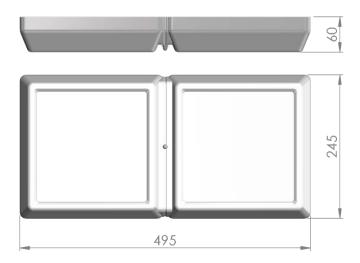

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.