LC Ceiling Style

LP-PVC12-72 Phase Cut 850

Art. No 51152608






	+7			
90°				90
75°			V	75
60°		200		60
45°		300		4:
X		500		
30°	15°	0°	15°	30
cd/klm	0 — C90 - C270			η = 1009

Luminous flux	2320 lm
Luminaire efficiency	130 lm/W
CRI	> 80
Correlated colour temperature	5000 K
Rated power	18 W
LED	Samsung LM561B
Dimmable	YES - to 10%
Input current	0.078 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	100 000 hours at 80%	
Service lile	luminous flux	
Housing	Polyvinyl chloride	
Diffuser	PMMA	
Installation	Surface mounting	
Dimensions – LxWxH	495x245x60 mm	
Weight	-	
Mark	CE, RoHS	
Origin	EU	
Manufacturer	Solar LED Power Ltd.	



Dimensional drawing:

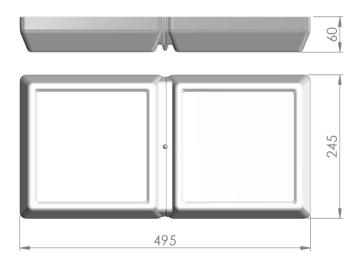

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.