


LC Ceiling Style



LP-PVC22-144 Phase Cut 850

Art. No 51152662

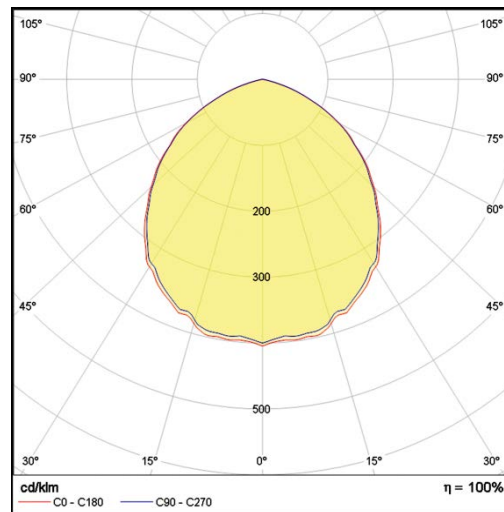

Luminous flux	5060 lm
Luminaire efficiency	130 lm/W
CRI	> 80
Correlated colour temperature	5000 K
Rated power	39 W
LED	Samsung LM561B
Dimmable	YES - to 10%
Input current	0.169 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	100 000 hours at 80% luminous flux
Housing	Polyvinyl chloride
Diffuser	PMMA
Installation	Surface mounting
Dimensions – LxWxH	495x495x60 mm
Weight	-
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:



Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.

www.ledpower.bg