



# LC Recessed Style

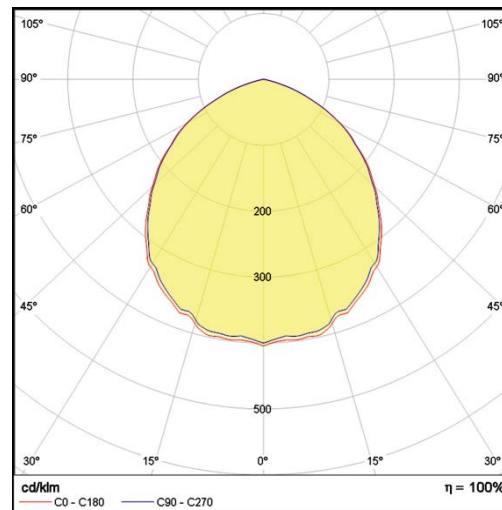

**LP-PVC30X120-100 850**

Art. No 510511034

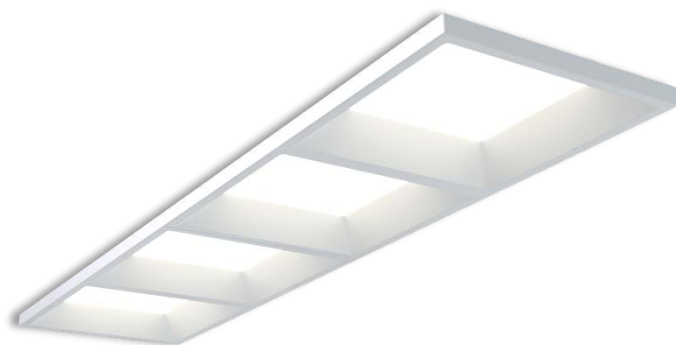


|                               |                |
|-------------------------------|----------------|
| Luminous flux                 | 3780 lm        |
| Luminaire efficiency          | 135 lm/W       |
| CRI                           | > 80           |
| Correlated colour temperature | 5000 K         |
| Rated power                   | 28 W           |
| LED                           | Samsung LM561B |
| Dimmable                      | NO             |
| Input current                 | 0.121 A        |
| Working voltage               | AC 220-240 V   |
| Ingress protection code       | IP20           |
| Mech. impact protection code  | -              |
| Working temperature           | -20 to +40°C   |

|                    |  |
|--------------------|--|
| Service life       | 100 000 hours at 80% luminous flux                             |
| Housing            | Polyvinyl chloride   |
| Diffuser           | PMMA   |
| Installation       | Recessed in modular ceilings with visible grid system 300x1200 |
| Dimensions – LxWxH | 1195x295x89 mm   |
| Weight             | 2 kg   |
| Mark               | CE, RoHS   |
| Origin             | EU   |
| Manufacturer       | Solar LED Power Ltd.   |



Dimensional drawing:

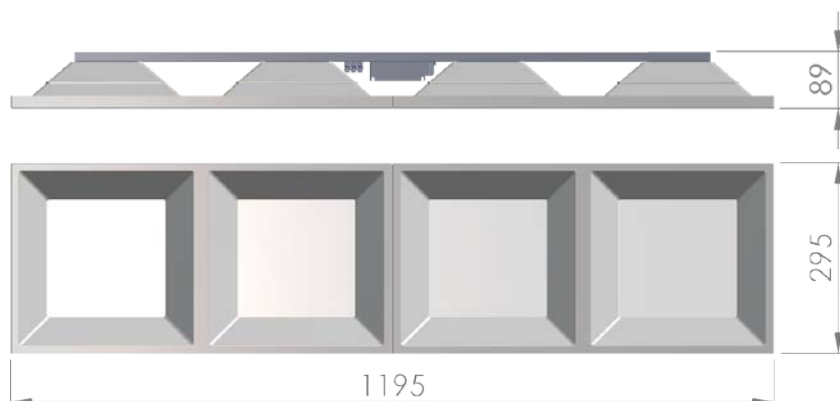

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.