


LC Recessed Style



LP-PVC60X30-50 DALI 850

Art. No 510531022

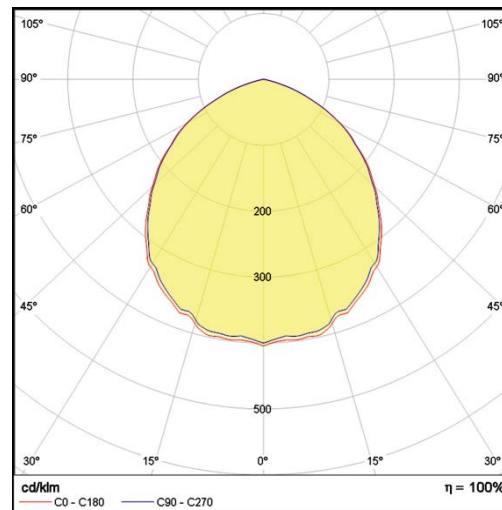


| | |
|-------------------------------|----------------|
| Luminous flux | 1890 lm |
| Luminaire efficiency | 135 lm/W |
| CRI | > 80 |
| Correlated colour temperature | 5000 K |
| Rated power | 14 W |
| LED | Samsung LM561B |
| Dimmable | YES - to 1% |
| Input current | 0.06 A |
| Working voltage | AC 220-240 V |
| Ingress protection code | IP20 |
| Mech. impact protection code | - |
| Working temperature | -20 to +40°C |

| | |
|--------------------|---|
| Service life | 100 000 hours at 80% luminous flux |
| Housing | Polyvinyl chloride |
| Diffuser | PMMA |
| Installation | Recessed in modular ceilings with visible grid system 600x300 |
| Dimensions – LxWxH | 595x297x80 mm |
| Weight | 0.8 kg |
| Mark | CE, RoHS |
| Origin | EU |
| Manufacturer | Solar LED Power Ltd. |



Dimensional drawing:

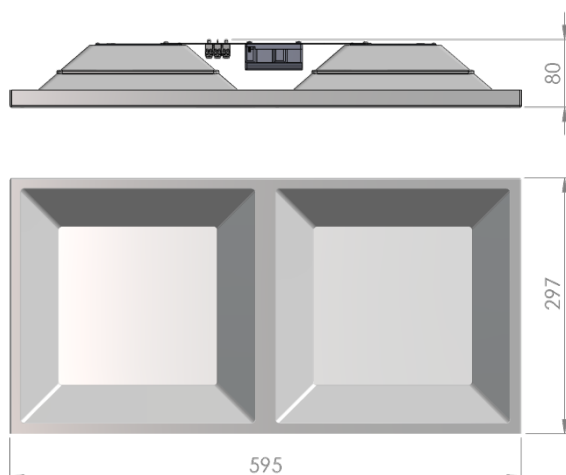

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.