


# LC Recessed Style



## LP-PVC60X30-72 840

Art. No 510411024

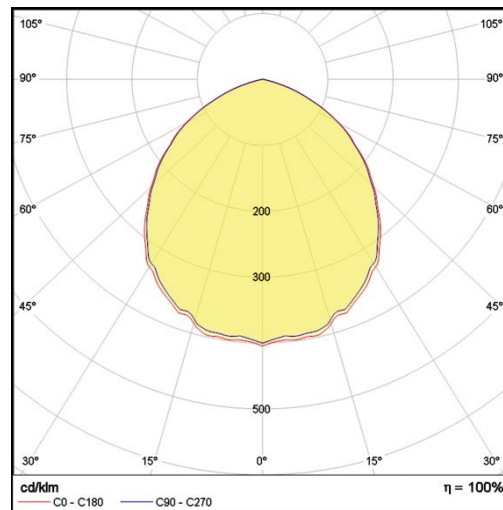


Luminous flux	2200 lm
Luminaire efficiency	123 lm/W
CRI	> 80
Correlated colour temperature	4000 K
Rated power	18 W
LED	Samsung LM561B
Dimmable	NO
Input current	0.078 A
Working voltage	AC 220-240 V
Ingress protection code	IP20
Mech. impact protection code	-
Working temperature	-20 to +40°C

Service life	100 000 hours at 80% luminous flux
Housing	Polyvinyl chloride
Diffuser	PMMA
Installation	Recessed in modular ceilings with visible grid system 600x300
Dimensions – LxWxH	595x297x80 mm
Weight	0.8 kg
Mark	CE, RoHS
Origin	EU
Manufacturer	Solar LED Power Ltd.



Dimensional drawing:

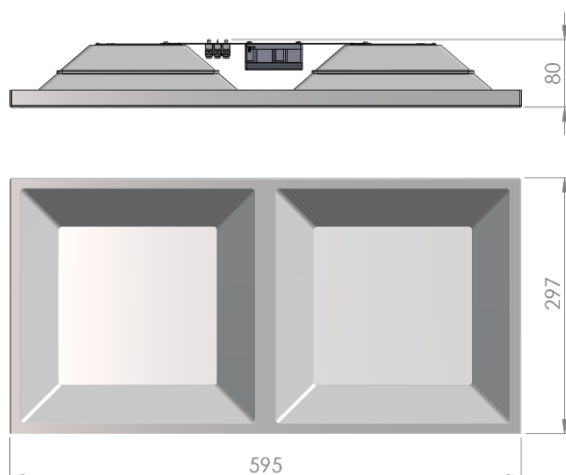

Solar LED Power Ltd. is constantly developing and improving its products. The right is reserved to change specifications without prior notification.

[www.ledpower.bg](http://www.ledpower.bg)